

PADS Ref: 092/002047

Safebox 32

The Safebox 32 is designed as a robust and long-term Class II distribution unit. It offers individual isolation of the supply in and out, as well as 3 functional outputs.


Each door to the terminal chambers are locked with a industry standard triangle utility key, allowing for easy access to those who require it. Each Safebox 32 is supplied with a key.

The terminal chambers are both protected by an insulated door, as well as a acrylic cover allowing connections to be inspected with a reduced risk to the operator.



- Class II Distribution Unit (690V rated).
- Isolators for Power IN and OUT along with 3 functional outputs.
- BS88 Fuse Carriers.
- Terminals to accommodate (Cu) or (Al) Feeder Cables 6 to 120mm².
- Designed for a Ring Circuit (FSP01/02).
- Removable gland plates allow for ease of installation.
- Gland plate to terminal distance: 150mm (+100mm with Extension Kit).
- 25mm output glanding holes to accommodate standard Class II conduit fittings for output wiring.

2

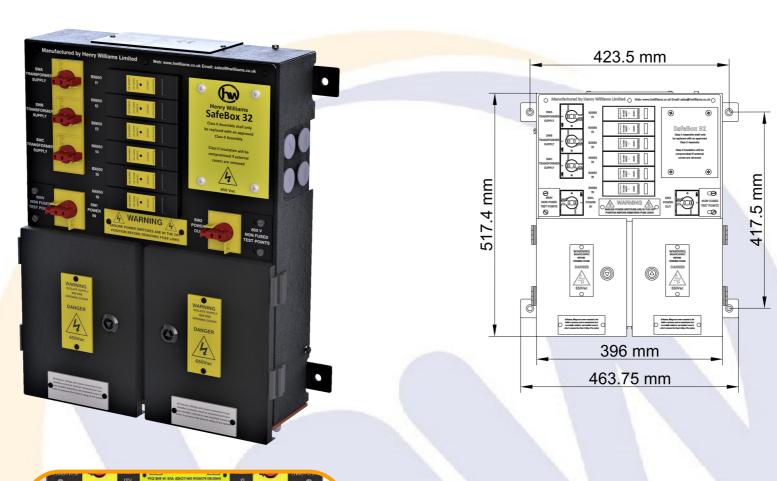



Main Terminal Arrangement

		Extras & Spares
Option		Description
Gland plate hole	e cut to size	To allow ease of installation, we offer a service to p
Location Case M	lounting Kit	A mounting kit fixes to the feet of the Safebox with mounting holes centers to 460mm to allow for inst case.
Extension Kit		To accommodate more unruly cables, an extension distance from the gland plate to the terminals. Two termination chamber is still enclosed and protected
Replacement Gl	and Plate	To allow for reuse and re-termination, a replaceme your required size.
Replacement Do	oor Key	Henry Williams are able to supply additional keys if
Rails and Bracke	etry	Henry Williams also manufacture all standard BRS- For more information, please visit our <u>website</u> or c



Distribution Switches Functional Switches Fuses

3

Contact us


Email: sales@hwilliams.co.uk

6

Web: www.hwilliams.co.uk

Tel: +44 (0) 1325 462722





Product Profile

5

pre-drill the gland plate to your required size .

h standard M8 fixings, and increases the distance of the tallation directly onto the uprights of a small apparatus

n kit can be used to add an additional 100mm to the vo replacement doors are also supplied to ensure the ed.


ent gland plate can be ordered. This can be pre-drilled to

f required.

-SM 440 rails and bracketry to mount Safeboxes. contact us.



PADS Ref: 092/002047

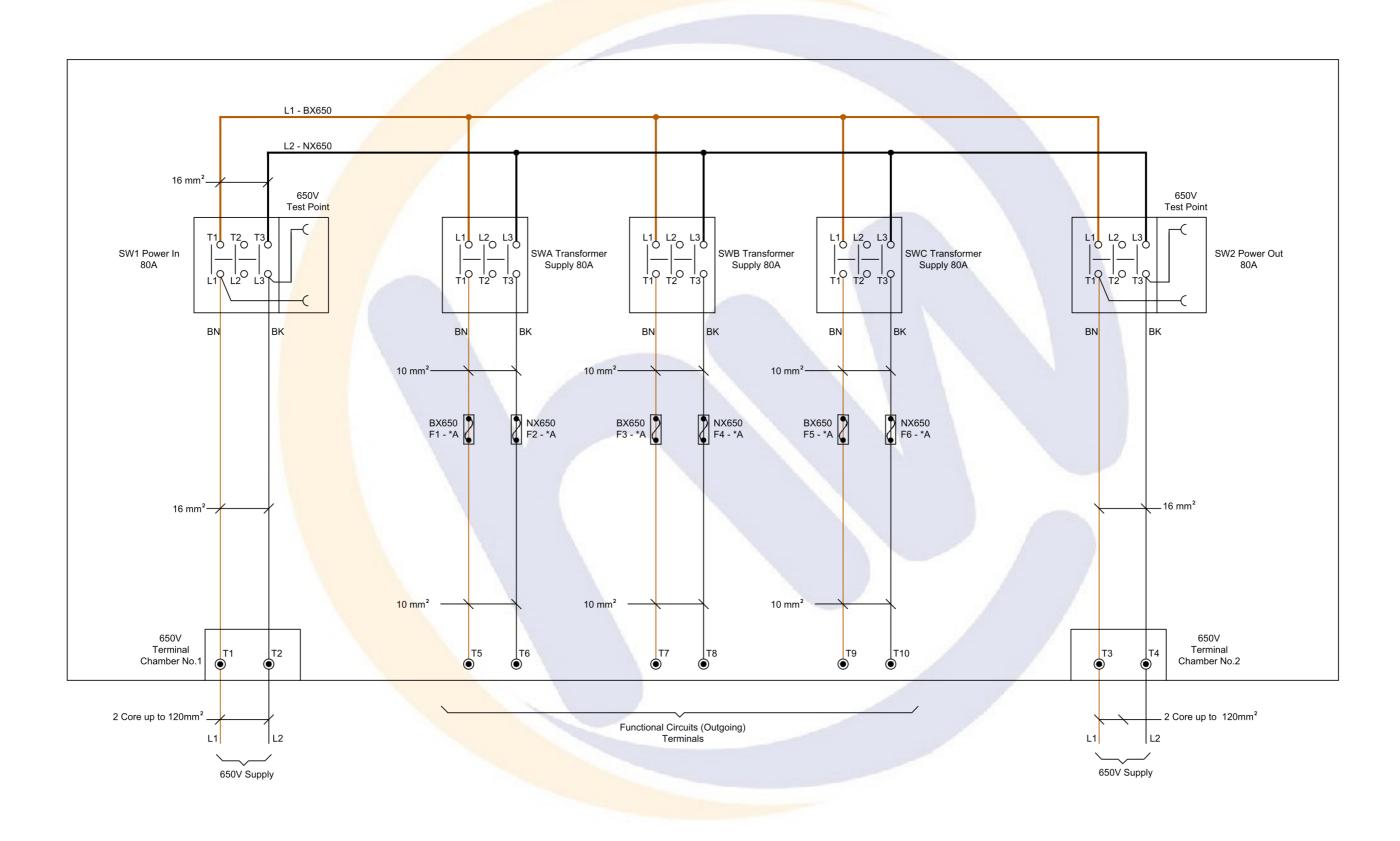

ⓑ SafeBox[™]

