




The 1SW50 is designed as a robust and long-term unit to suit a legacy circuit.


The 1SW50 provides 1 functional output, and isolation of the power out.

This unit is designed to receive cables from 2.5mm²(Cu) or 6mm²(Al) up to 50mm².

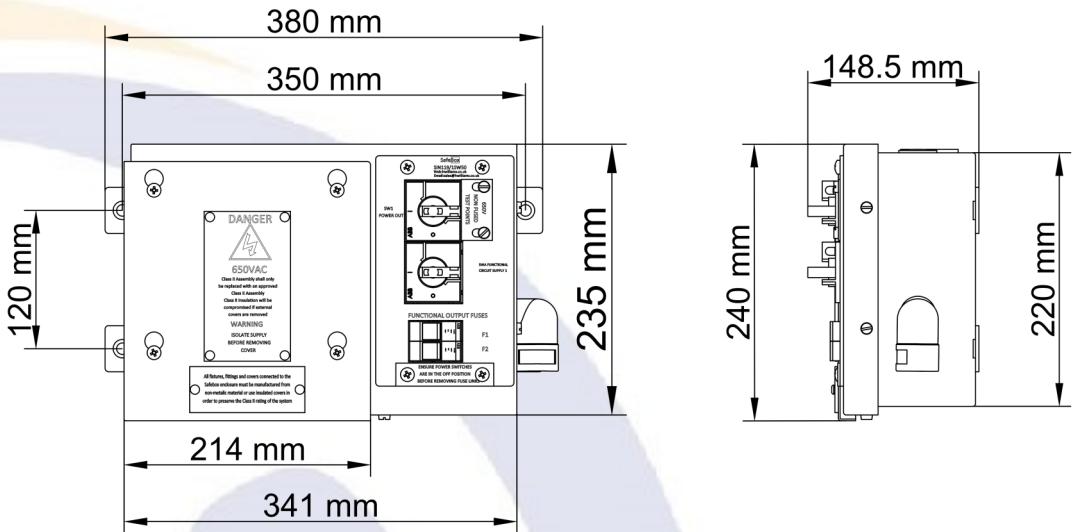

Product features:

- Class II Distribution Unit (690V rated).
- Isolators for Power OUT along and a functional output.
- IEC 60269 Fuse Carriers (10 x 38mm).
- Terminals to accommodate Feeder Cables 2.5mm² (Cu) or 6mm² (Al) up to 50mm².
- Designed for a Legacy Circuit (FSP04).
- Removable gland plates allowing for ease of installation.
- Gland plate to terminal distance: 126mm
- 25mm 90 degree conduit fitting fitted as standard.
- Each unit is supplied with approximately 2m's of BS6231 Tri-rated cable.

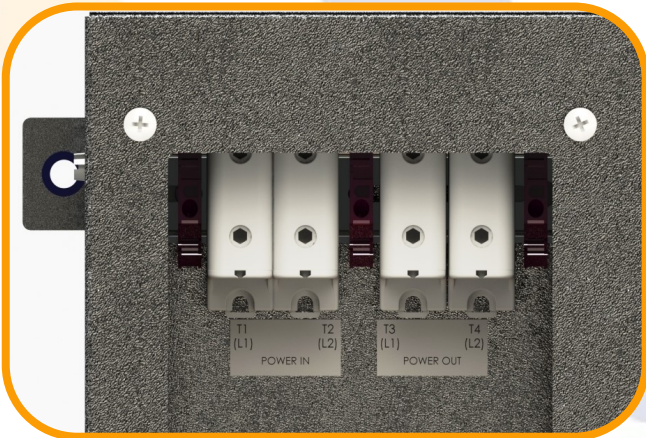

Main Terminal Arrangement

| Distribution Switches | Functional Switches | Fuses |
|-----------------------|---------------------|-------|
| 1 | 1 | 2 |

| Extras & Spares | |
|------------------------------|---|
| Option | Description |
| Gland plate hole cut to size | To allow ease of installation, we offer a service to pre-drill the gland plate to your required size . |
| Replacement Gland Plate | To allow for reuse and re-termination, a replacement gland plate can be ordered. This can be pre-drilled to your required size. |
| Rails and Bracketry | Henry Williams also manufacture all standard BRS-SM 440 rails and bracketry to mount Safeboxes. For more information, please visit our website or contact us. |



