
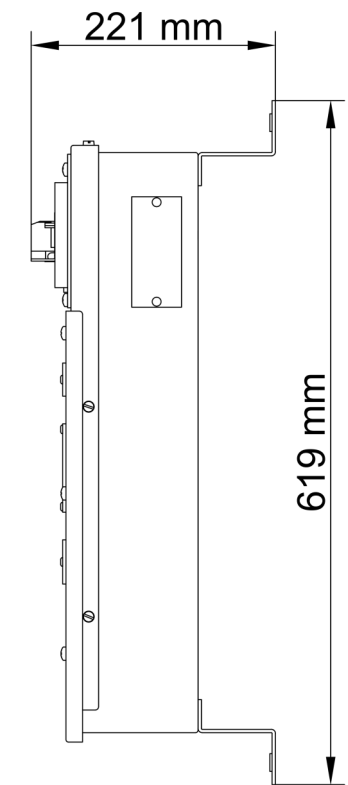


The SL11/C is designed as a robust and long-term Class II distribution unit. This unit is designed for a Legacy Circuit (FSP04), and can be mounted inside a Legacy Annexe enclosure.

Each terminal chamber is protected by the insulated cover, as well as an individual acrylic cover allowing connections to be inspected with a reduced risk to the operator.

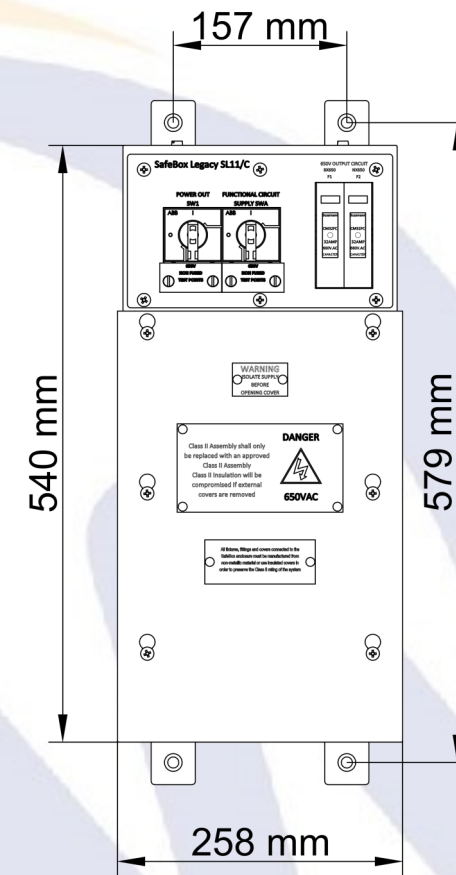

Product features:

- Class II Distribution Unit (690V rated).
- Isolator to break power feeding out of the enclosure as well as 1 functional output.
- BS88 A1 Fuse Carriers.
- Terminals to accommodate (Cu) or (Al) Feeder Cables 6 to 120mm².
- Designed for a Legacy Circuit (FSP04).
- Removable gland plates allow for ease of installation.
- Gland plate to terminal distance: 307mm
- 25mm output glanding hole to accommodate standard Class II conduit fittings for output wiring.



Main Terminal Arrangement

Distribution Switches	Functional Switches	Fuses
1	1	2

Extras & Spares


Option	Description
Gland plate hole cut to size	To allow ease of installation, we offer a service to pre-drill the gland plate to your required size .
Replacement Gland Plate	To allow for reuse and re-termination, a replacement gland plate can be ordered. This can be pre-drilled to your required size.
Rails and Bracketry	Henry Williams also manufacture all standard BRS-SM 440 rails and bracketry to mount Safeboxes. For more information, please visit our website or contact us.



Contact us

Product Profile

Product Profile

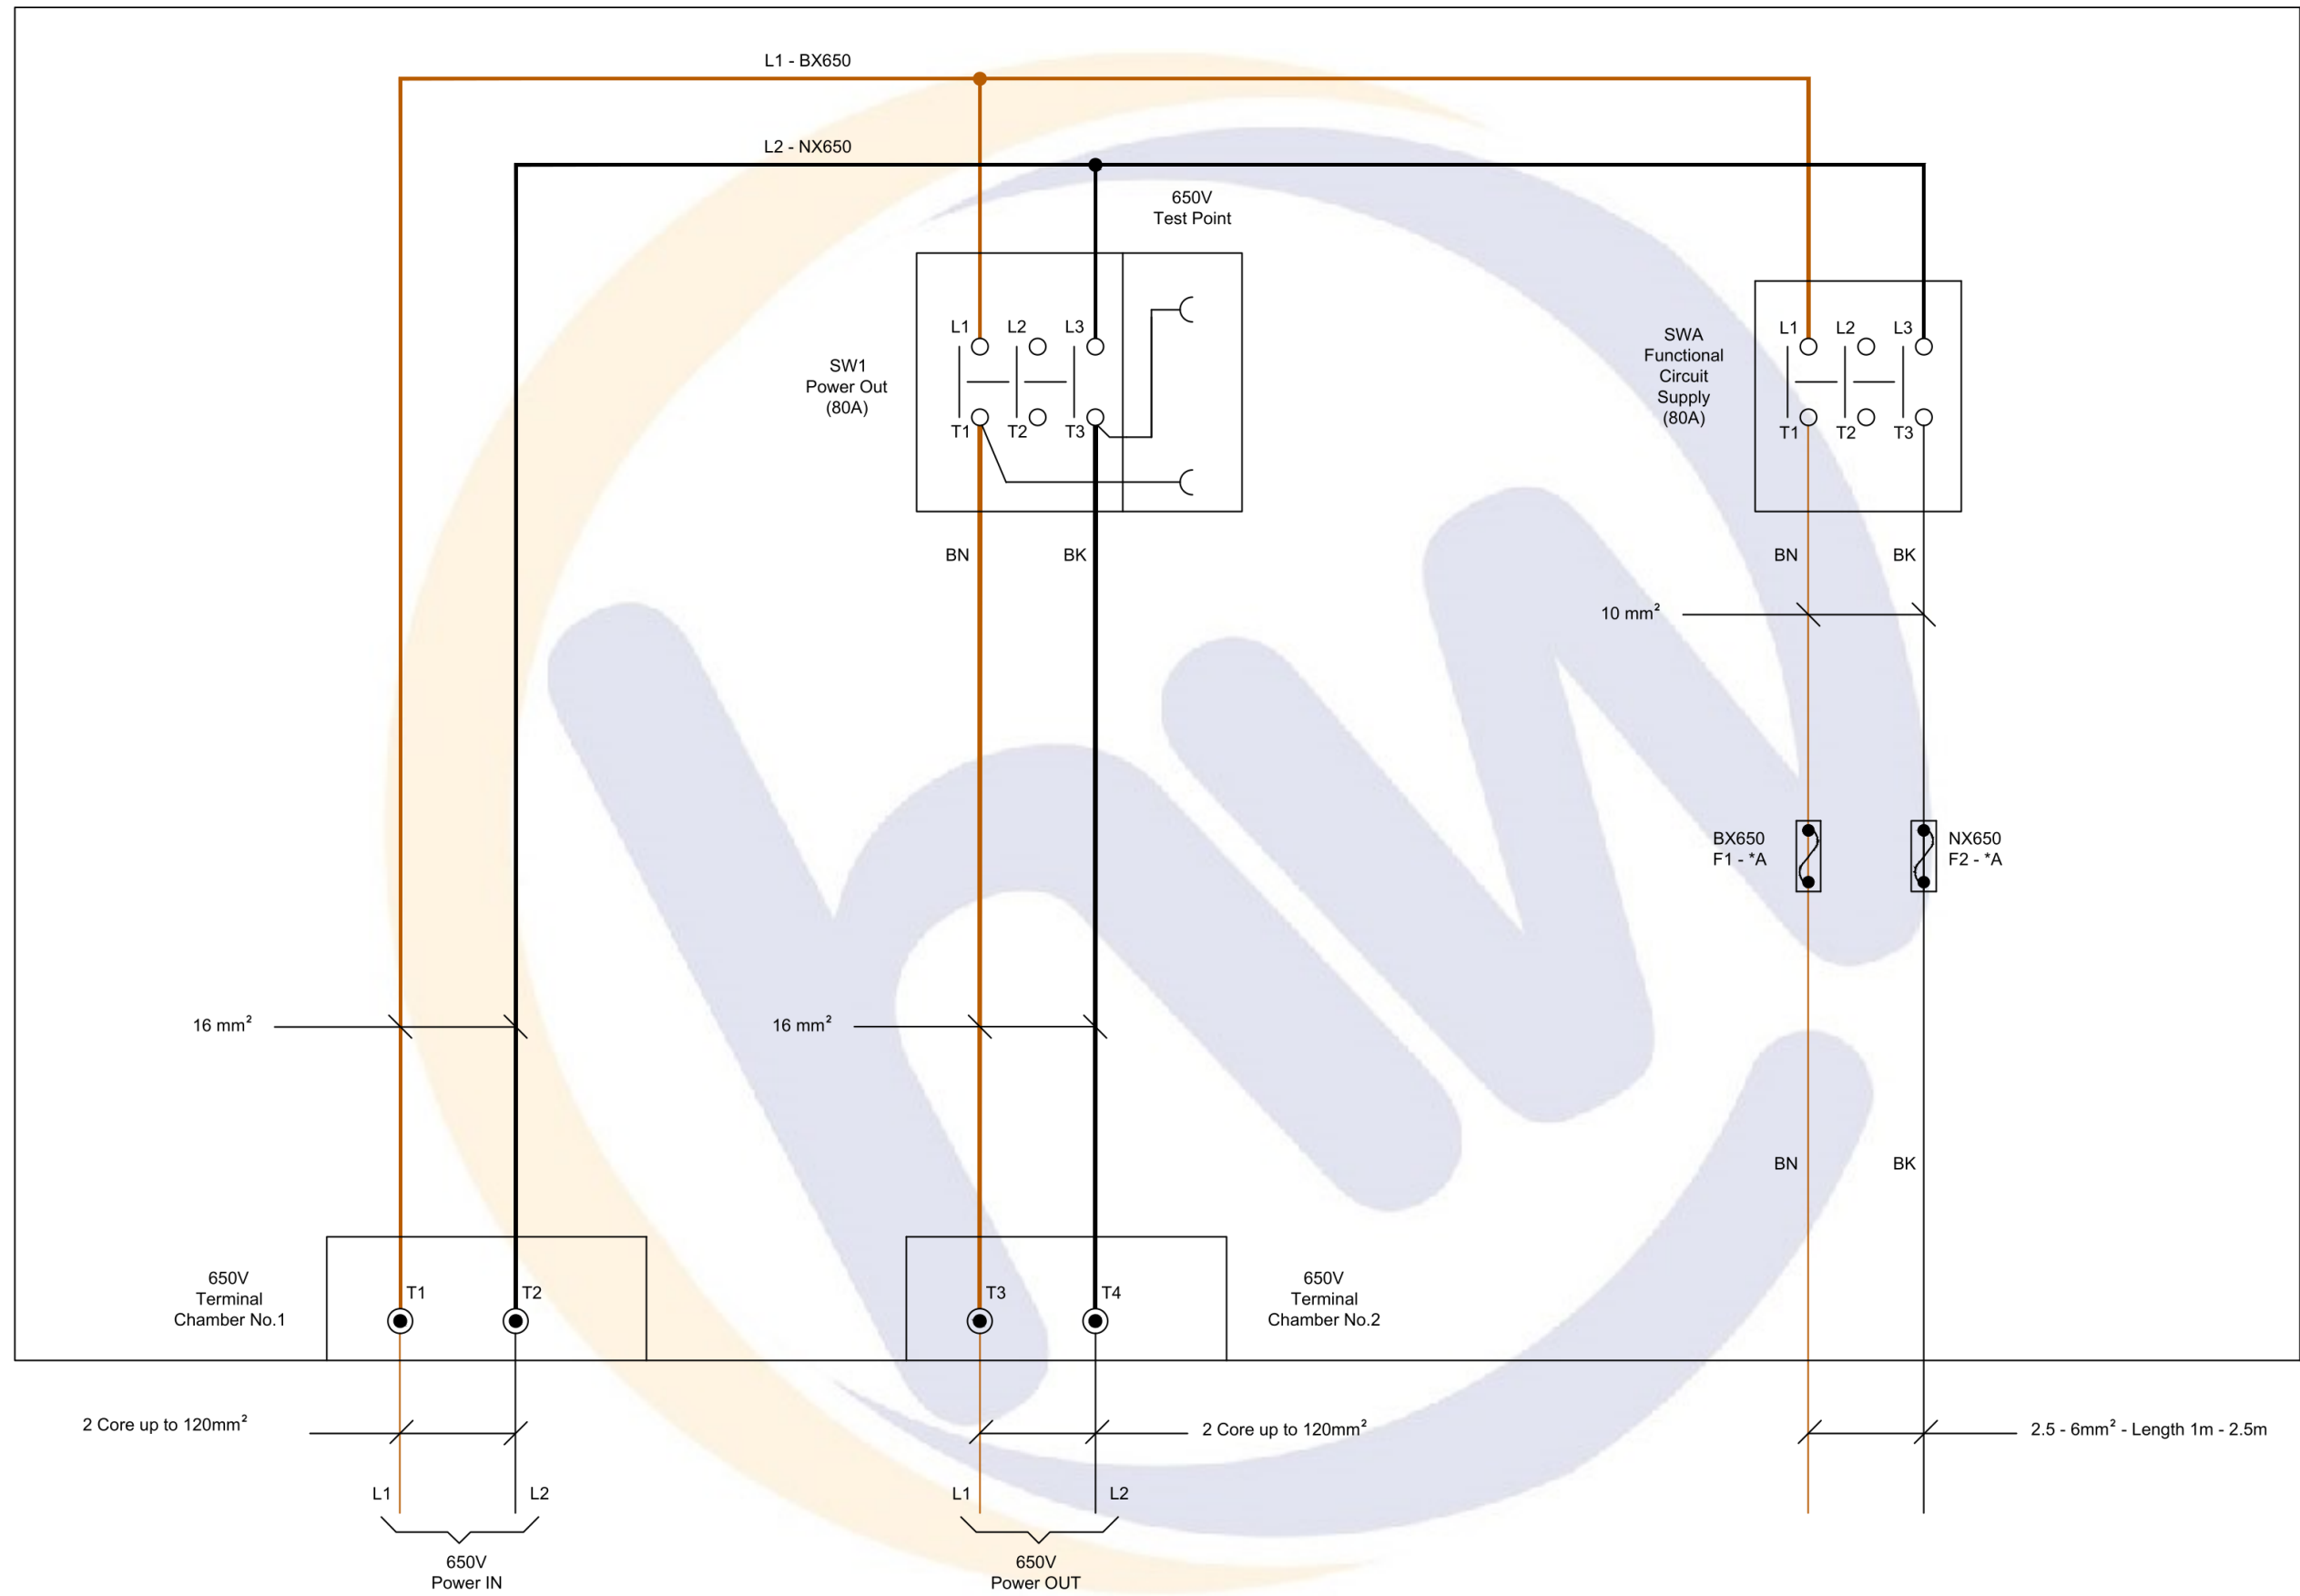

Contact us

Email: sales@hwilliams.co.uk

Web: www.hwilliams.co.uk

Tel: +44 (0) 1325 462722